


# LS200 Series Liquid Level Switches

## Electric Switch

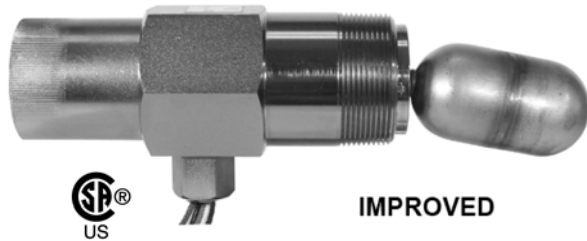

**LS200** Liquid Level Switches with 2" NPT mounting are float activated to operate an electrical SPDT snap switch (optional DPDT on some models) for alarm or shutdown of an engine or electric motor. The LS200 connects directly into the vessel wall and can be used with a Murphy weld collar (P/N 15050375) or Murphy external float chamber (P/N 15700799).


**LS200NDVOR** is a float-activated, pneumatic-vent level device used to operate dump valves or similar devices.

The LS200NDVOR provides a 2" NPT mounting with a pneumatic output for interfacing with pneumatic devices such as our Murphy pneumatic dump valve or with other pneumatic instrumentation.

**LS200NDVO** is the Dump Valve Operator (DVO) without the pressure regulator for those applications where the system provides a filter regulator for instrument quality air or gas as the control medium.

**LS200N** is the pneumatic level switch without the DVO and filter regulator.

**NOTE:** Pneumatic media devices require clean, dry, instrument-quality air or gas. This unit is supplied with a pressure regulator, filter and Murphy 20BPG pressure gage for improved system life and trouble-free operation.

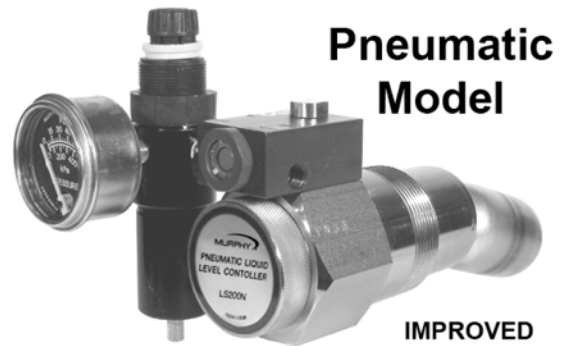

## Features

- Designed for harsh gas compressor scrubber applications
- 304 stainless steel float operates in 0.55 specific gravity and heavier fluids (see Table 1)
- LS200 series rated for 2000 psi (13.8 MPa) [138 bar] working pressure
- Electric and pneumatic models available
- More robust design
- All models screw directly into the vessel or can be mounted via external float chamber
- Nickel-plated body to provide enhanced corrosion protection
- Listed for Class I, Div. 1, Grp. C & D locations
- Canadian Registration Number OF1476.2
- Stainless steel models are available for corrosive atmospheres.
- Trip on rising liquid level only

**NOTE:** The Murphy Series 1200 Liquid Level Switches have been replaced with the improved, more robust design of the Murphy LS200 Series Liquid Level Switches. The MSLS (Scrubber Level System) replaces the LS200 high-level shutdown switch with the MLS-020 magnetic level switch.

## Accessories

Refer to LS200 Installation and Operations manual for additional information.

### External Float Chamber 15700799

**Operating pressure:** 2000psi (13.8MPa)[138 bar]

**Operating temperature:** 400°F (204°C)

### Weld Collar 15050375

**Operating pressure:** 2000psi (13.8MPa)[138 bar]

**Operating temperature:** 400°F (204°C)

**Shipping weight:** 6 lb. (2.7kg)

**Float Shaft Extension, 1", 15000478 (LS200 Series only)**

**Float Shaft Extension, 1", 15000892 (L1100 Series only)**


**Float Shaft Extension, 6", 15000503 (LS200 Series only)**

Model	Float Extension length (inch)	Pressure (psi)	Specific Gravity
LS200	0	2000	0.55
	1		0.7
	6		1
LS200NDVO	0	2000	0.63
	1		0.73
	6		1.02

**Note:** The minimum allowable SG will decrease with a decrease in operating pressure.

## Product Dimensions

LS200, L1100

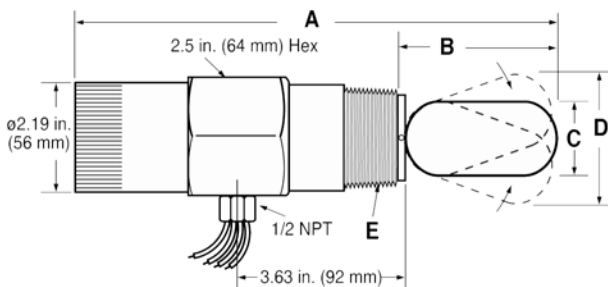

	LS200	L1100
<b>A</b>	10.16 in. (258 mm)	11 in. (279 mm)
<b>B</b>	3.44 in. (87 mm)	3.50 in. (189 mm)
<b>C</b>	1.75 in. (44 mm)	1.56 in. (40 mm)
<b>D</b>	2.80 in. (71 mm)	3.4 in. (71 mm)
<b>E</b>	2 NPT	1-1/2 NPT


## Application Data

Nom. Size (inches)	O.D. (inches)	Schedule Number	Wall Thickness (inches)	Inside Diameter (inches)
3	3.5	40ST	0.216	3.068
3	3.5	80XS	0.3	2.9
4	4.5	40ST	0.237	4.026
4	4.5	80XS	0.337	3.826

Product Name	Insertion Depth (inches)		Vertical Clearance (inches)	
	Std.	w/ 1" Extension	Std.	w/ 1" Extension
LS 200	4.6	5.6	2.8	3.15
LS 200N	5.43	6.4	3.3	3.9
L 1200	4.65	5.7	3.9	4.55
L 1200N	5.6	6.7	5.3	6.9
L 1100	4.4	5.4	3.4	4.05

Models L 1200, L 1200N and L 1100 are discontinued and remain in the table for reference purposes only.

## LS200N, LS200NDVO and LS200NDVOR with Dump Valve Operator, Pressure Regulator & Gage

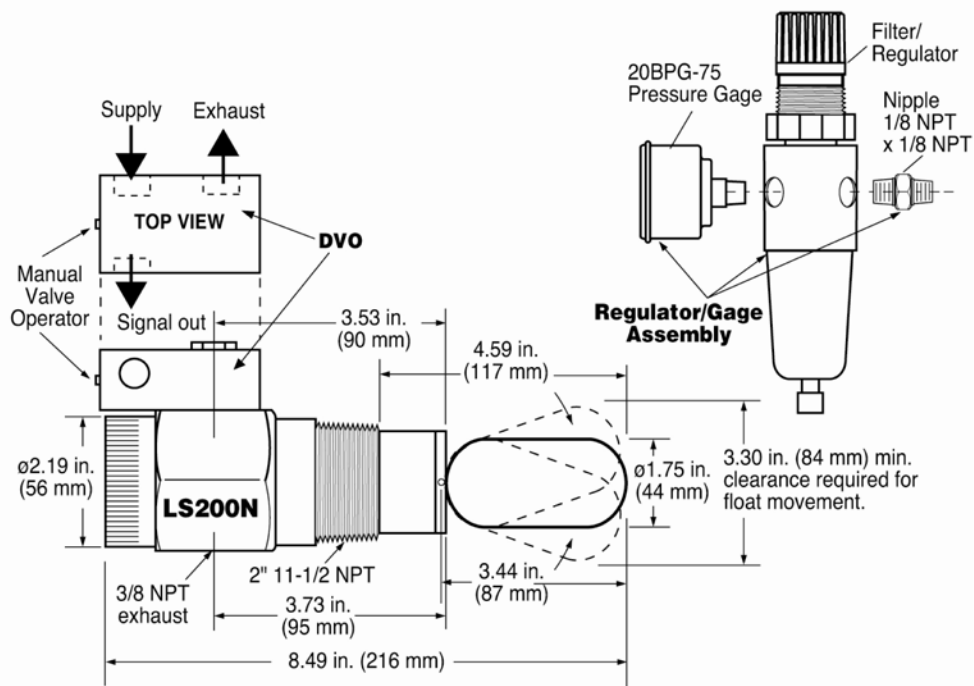

**CAUTION: LS200 Series parts are not interchangeable with the L1200 Series.**

## Specifications

### All Models

Body: Nickel-plated steel; optional 316 stainless steel  
 Float: 304 stainless steel  
 Pressure rating: 2000 psig (13.8 MPa) [138 bar] (LS200 models only)  
 O-ring: Viton

### LS200

Process connection: 2" NPT  
 Temperature rating: -20 to 300°F (-29 to 149°C)  
 Electrical: SPDT std. (see "Electrical" section for configuration/rating).  
 Wiring: 18 AWG x 36 in. (1.0 mm<sup>2</sup> x 916 mm)

### LS200NDVOR

Process connection: 2" NPT  
 DVO valve: 3 way N.C. w/manual operator, all connections 1/8" NPT (minimum 30 psig required)  
 Filter/pressure regulator set:  
 Regulator: 0 to 75 psig (0 to 517 kPa) [0 to 5.17 bar] range  
 Maximum input pressure: 300 psig (2.07 MPa) [20.7 bar]

### LS200NDVO

Process connection: 2" NPT  
 DVO valve: 3 way N.C. w/manual operator; all connections 1/8" NPT

### LS200 N

Process connection: 2" NPT  
 Vent valve: 2 way N.C. w/ 1/16in. (2mm) orifice and Viton seat; Inlet: 1/8" NPT; outlet 3/8" NPT

### L1100


Process connection: 1-1/2" NPT  
 Pressure rating: 1500 psig (10.3 MPa) [103.2 bar]  
 Float: BUOYGLAS™ operates to 0.5 specific gravity;  
 Optional stainless steel to operate in 0.65 specific gravity  
 Electrical: SPDT switch

### Approximate Shipping Weights and Dimensions

All models: 6 lb. 10 oz. (3 kg);  
 14 x 5 x 3-1/2 in. (356 x 127 x 89 mm)


## Electrical

#### SPDT (Snap Switch)



Switch Rating: 5 A @ 125-250- 480 VAC  
 1/2 A @ 125 VDC  
 1/4 A @ 250 VDC  
 2A @ 6-30 VDC Resistive  
 1A @ 6-30 VDC Inductive

#### DPDT (Snap Switch)



Switch Rating: 10 A @ 125-250 VAC  
 1/2 A @ 125 VDC  
 1/4 A @ 250 VDC  
 10 A @ 6-24 VDC Inductive/Resistive

### LS200 --

Options:  
 D = DPDT  
 K = KALREZ Seals  
 400 = 400°F (204°C) Service \*\*  
 SF - Stainless Steel Float (L1100 only)

#### Base Models:

LS200*	LS200SS*
LS200N*	LS200NSS*
LS200NDVO*	LS200NSSDVO*
LS200NDVOR*	LS200NSSDVOR*
L1100**~	
L1111	

## How to Order your Level Switch

Build a complete model number using the diagram to the left.  
 NOTE: Refer to LS-04006N for replacement parts.

\*Pending Canadian Registration Number OF1476.2 issued by ABSA.

\*\*Not available with DPDT snap-switch.

~Supplied with BUOYGLAS™ float.

ENOVIATION CONTROLS CORPORATE HEADQUARTERS  
 5311 S 122ND EAST AVENUE  
 TULSA, OK 74146

ENOVIATION CONTROLS – SAN ANTONIO OFFICE  
 5757 FARINON DRIVE  
 SAN ANTONIO, TX 78249

ENOVIATION CONTROLS – HOUSTON OFFICE  
 105 RANDON DYER RD  
 ROSENBERG, TX 77471

ENOVIATION CONTROLS LTD. – UNITED KINGDOM  
 CHURCH ROAD LAVERSTOCK  
 SALISBURY SP1 1OZ UK

MURPHY ECONTROLS TECHNOLOGIES (HANGZHOU) CO, LTD.  
 77 23RD STREET  
 HANGZHOU ECONOMIC & TECHNOLOGICAL DEVELOPMENT AREA  
 HANGZHOU, ZHEJIANG 310018 CHINA

#### DOMESTIC SALES & SUPPORT

ECONTROLS PRODUCTS  
 PHONE: 210 495 9772  
 FAX: 210 495 9791  
 EMAIL: INFO@ECONTROLS.COM  
 WWW.ECONTROLS.COM

MURPHY PRODUCTS  
 PHONE: 918 317 4100  
 FAX: 918 317 4286  
 EMAIL: SALES@FWMURPHY.COM  
 WWW.FWMURPHY.COM

MURPHY CONTROL SYSTEMS & SERVICES  
 PHONE: 281 633 4500  
 FAX: 281 633 4588  
 EMAIL: CSS-SOLUTIONS@FWMURPHY.COM

MURPHY INDUSTRIAL PANEL DIVISION  
 PHONE: 918 317 4100  
 FAX: 918 317 4124  
 EMAIL: IPDSALES@FWMURPHY.COM

#### INTERNATIONAL SALES & SUPPORT

UNITED KINGDOM  
 PHONE: +44 1722 410055  
 FAX: +44 1722 410088  
 EMAIL: SALES@ENOVIATIONCONTROLS.EU  
 WWW.FWMURPHY.EU

CHINA  
 PHONE: +86 21 6237 5885  
 FAX: +86 21 6237 5887  
 EMAIL: APSALES@FWMURPHY.COM

LATIN AMERICA & CARIBBEAN  
 PHONE: 918 317 2500  
 EMAIL: LASALES@FWMURPHY.COM

SOUTH KOREA  
 PHONE: +82 70 7951 4100  
 EMAIL: SKOREASALES@FWMURPHY.COM

INDIA  
 PHONE: +91 91581 37633  
 EMAIL: INDIALES@FWMURPHY.COM

ISO 9001  
 REGISTERED



USA (TULSA) - ISO 9001:2008 FM 28221  
 USA (ROSENBERG) - ISO 9001:2008 FM 28221  
 UK - ISO 9001:2008 FM 29422  
 CHINA - ISO 9001:2008 FM 523851  
 Registered Facilities

Printed in the USA