


Technical specification


	PSSU/1	PSSU/2	PSSU/3	PSSU/4
Supply voltage	110/230V a.c.	24Vdc	110/230V a.c.	24Vdc
Power consumption	<6VA	<6VA	<6VA	<6VA
Enclosure type	DIN rail	DIN rail	Wall mounted	Wall mounted
Enclosure rating	IP20	IP20	IP67	IP67
Response time	10ms	10ms	10ms	10ms
Weight	225g	225g	365g	365g
Sensor wiring	Fail-safe only			
Reset mode	Manual (remote)			
Out put relays	2 x safety relays (force guided contacts) cross monitored			
Output contacts	2 x N/O, 2A @ 240V			
Applications	Medium/high risk safety applications			
Operating temperature	0°C to +50°C			
Safety standards	Category 3: EN 954-1			

Connection Details


PSSU/1

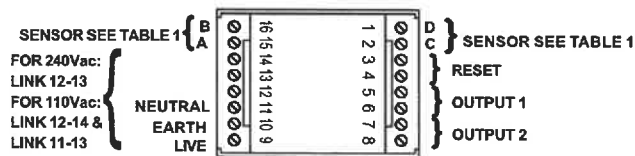


PSSU/2

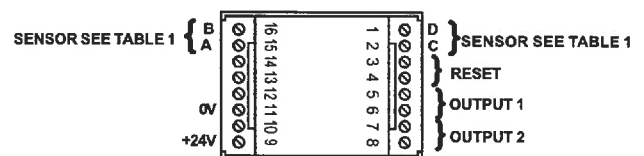

PSSU/3

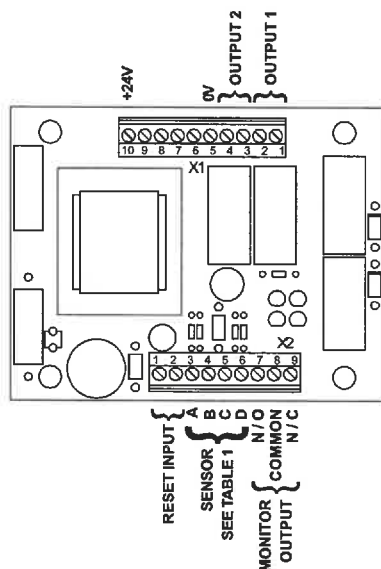

PSSU/4

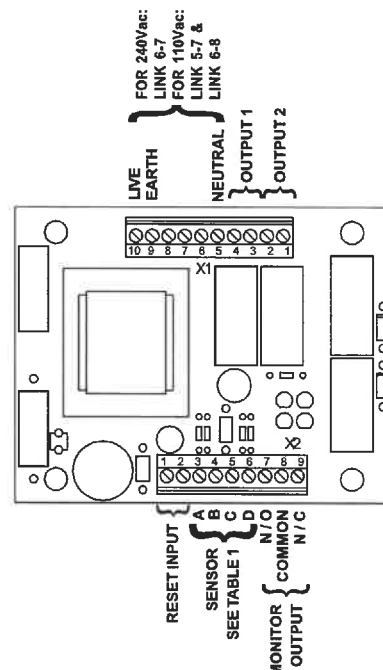

Tapeswitch Ltd.
 Unit 38 Drumhead Road
 Chorley North Industrial Park, Chorley
 Lancs PR6 7BX England
 Tel: +44 1257 249777
 Fax: +44 1257 246600
 e-mail: info@tapeswitch.co.uk
 web: www.tapeswitch.co.uk

Tapeswitch GmbH
 Grein Tapeswitch
 Tapeswitch Corporation
 Tapeswitch Japan
 Tapeswitch Canada

Tel: +49 5101 14490
 Tel: +39 226300 140
 Tel: +1 631630 0442
 Tel: +81 3 5676 5421
 Tel: +1 519681 2980

Fax: +49 5101 14499
 Fax: +39 226300 711
 Fax: +1 631630 0454
 Fax: +81 3 5676 5422
 Fax: +1 519685 9318